




380 Stewart Road Hanover Twp, PA 18706  
 PH: 570-825-1900  
 FAX: 570-825-7108

## Lighthawk LED GEN II

### Specifications:

|                       |  |
|-----------------------|--|
| Power Source:         | 4 Cell Lithium Ion Battery                 |
| LED Life:             | 30,000 Hours                               |
| Light Output:         | 300 Lumens High Mode / 125 Lumens Low Mode |
| Peak Beam Intensity:  | 70,000 Candela                             |
| Beam Distance:        | 447 M                                      |
| Battery Run Time:     | 7 Hours High Mode / 14 Hours Low Mode      |
| Impact Rating:        | 1 Meter                                    |
| Weight:               | 1.9 lbs (with battery)                     |
| Length:               | 9.5 in.                                    |
| Width:                | 3.12 in.                                   |
| Height:               | 5.12 in.                                   |
| Operating Temp Range: | - 20C to 50C                               |

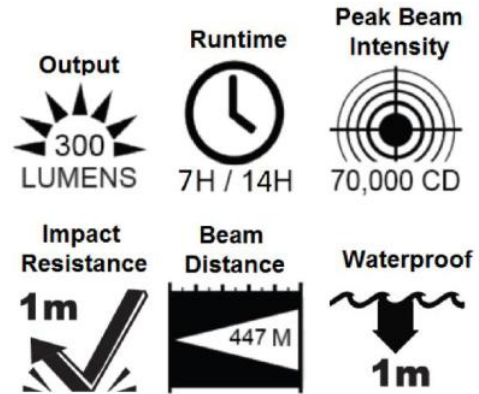

NFPA 1901-14.1.11.2 (2003) Certified Mounted in any Position

### Standard Features:

- Wall and Vehicle Mountable
- Dual Mode Main Beam  
High Mode / Low Mode
- Super Tough Nylon Construction
- LED charge Status Indicator
- Non-Slip rubber bottom and handle
- Low Battery Indicator
- Dual Mode High Visibility Signal Tail Light  
Flashing Mode/ Steady Mode
- Easily adjustable articulated head
- Quick release shoulder strap
- Limited Lifetime warranty



| Part #s:   | Description                         |
|------------|-------------------------------------|
| 07610      | 4-cell, Orange, 120V AC             |
| 07610 UTIL | 4-cell, Orange, 120V AC & 12/24V DC |
| 07630      | 4-cell, Orange, 12/24V DC           |
| 07650      | 4-cell, Orange, 220V AC             |
| 07670      | 4-cell, Orange, Direct Wire         |
| 07612      | 4-cell, Yellow, 120V AC             |
| 07612 UTIL | 4-cell, Yellow, 120V AC & 12/24V DC |
| 07632      | 4-cell, Yellow, 12/24V DC           |
| 07652      | 4-cell, Yellow, 220V AC             |
| 07672      | 4-cell, Yellow, Direct Wire         |
| 07611      | 4-cell, Black, 120V AC              |
| 07611 UTIL | 4-cell, Black, 120V AC & 12/24V DC  |
| 07631      | 4-cell, Black, 12/24V DC            |
| 07651      | 4-cell, Black, 220V AC              |
| 07671      | 4-cell, Black, Direct Wire          |

### Safety Certification



Class I, II, III, Division 1, Groups C - G, T1  
 Class I, II, III, Division 2, Groups A - G, T5  
 -20°C to +50°C



Ingress Protection Level: IP67 1 meter

### Accessories Description

|            |  |
|------------|--|
| 9B-1962-1  | 4-Cell Replacement Lithium-Ion Battery |
| 9B-1963-2  | 6-Cell Replacement Lithium-Ion Battery |
| 07690      | Charger Base                           |
| 20628      | 120V AC Adapter                        |
| 21132      | Shoulder strap                         |
| 21134      | Seat Belt Style Strap                  |
| 20629      | 220V Euro Cord                         |
| 07870      | 12/24V DC Cord                         |
| 3B-2033    | Direct Wire Kit                        |
| 10B-1926   | Magnet Kit                             |
| 10B-1926-I | Magnet Kit Installed                   |

## SAFETYWARE SDN BHD (632971-X)

Plot 237, Lengkok Perindustrian Bukit Minyak 3, Bukit Minyak Industrial Estate,  
 14100 Simpang Ampat, Penang, Malaysia.

Tel: +604-5023 882 (8 lines) Fax: +604-5070 882

www.safetyware.com | info@safetyware.com

