



2224LED Specifications

Unit Information

Model #: 2224LED / Item # 15720
UPC-IC (12Digit): 016731157203

Master Pack Dimensions

Weight: 10.8 lbs. (4.9 kg)
Cube: 1.43 ft³ (0.04 m³)
Quantity: 24

Specifications

Power Source: 3 x 'D' Cell Alkaline
Light Source: LED
Life: 30,000 hrs
Runtime: 250 hrs
Beam Distance: 88 meters
Light Output: 60 Lumens
Weight (Without batteries): 6.0 oz (.17 kg)

Product Features

- For use in hazardous atmospheres
- 'S' Biner included for quick attachment
- Waterproof, IP 67 rating
- 'Switch Guard' prevents accidental lighting
- Anti-roll tube
- Faceted reflector for more light
- Three way switch: On-Momentary-Off

Accessories

23853	6 ½" Red Snap In Wand
23860	6 ½" Yellow Snap In Wand


Description

Unit Dimensions

Length: 10.2 in. (25.1 cm)
Width: 2.3 in. (5.8 cm) at head

Safety Approvals

UL Protection Methods
Intrinsically Safe
Divisions 1 & 2
Class I, II, III Div 1 Groups A-G
Class I, II, III Div 2 Groups A-G
Operating Temp T5

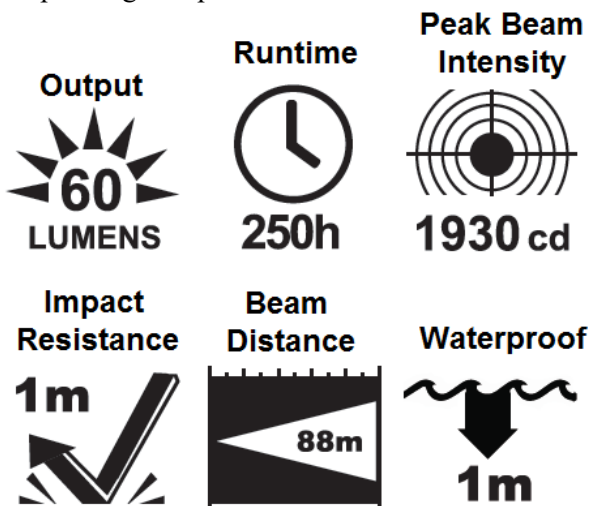

WorkSafe™ Model #2224LED



SAFETYWARE SDN BHD (632971-X)

Plot 237, Lengkok Perindustrian Bukit Minyak 3, Bukit Minyak Industrial Estate,
14100 Simpang Ampat, Penang, Malaysia.

Tel: +604-5023 882 (8 lines) Fax: +604-5070 882

www.safetyware.com | info@safetyware.com

Safetyware
SAFETYWARE GROUP
Responsibility & Care