

FALL PROTECTION

RESPECT THE LAW OF GRAVITY.
ENFORCE THE LAW OF SAFETY.

2026-2027



www.safetyware.com
info@safetyware.com

INTRODUCTION

SAFETYWARE GROUP:

Safetyware is a leading integrated safety and health solutions provider with over 30 years of experience, serving more than 10,000 customers in 130 countries. Our expertise as a manufacturer, trader, and distributor is backed by rigorous ISO 9001, CE, and SIRIM certifications.

At the core of our commitment to safety is our high-performance Fall Protection division. We are proud to be the premier partner for K-Strong, offering a world-class range of harnesses, lanyards, and self-retracting lifelines engineered for maximum reliability and operator comfort.

Our most specialized service, however, lies in our end-to-end Lifeline Project capabilities. We provide turn-key solutions that include professional site assessment, custom-engineered design, and certified installation of horizontal and vertical lifeline systems. From complex industrial heights to site-specific infrastructure, trust Safetyware to not only equip your team but to engineer the very systems that keep them safe at elevation.



SIRIM DOSH APPROVED

BODY HARNESS

Personal Protection Equipment (PPE)



SAFETYWARE FULL BODY HARNESS FPE101

The SAFETYWARE Full Body Harness is an EN 361 and SIRIM-DOSH approved fall-arrest solution. It features high-strength, dual-color webbing, three D-ring attachment points (one rear, two chest), and a 5-point adjustment system for a secure, durable fit.

- Maximum Load: 140kg
- Attachment: 1 Dorsal D-Ring, 2 Chest D-Rings
- Buckle(s): 5 Adjustment Positions (Mating/Pass-Through Buckles)
- Webbing Breaking Strength: More than 27kN (6000 lbs)
- Weight: 1.00kg ± 100g



EN 361:2002

SIRIM-DOSH
APPROVED



5-Point
Adjustment



3-Point
Attachment

SIRIM DOSH APPROVED

Personal Protection Equipment (PPE)

BODY HARNESS



K-STRONG ESSENTIAL HARNESS

AFH300058

The K-Strong Essential Harness is a light-weight fall-arrest and work-positioning solution featuring a 5-point adjustment system, UV-resistant webbing, and a padded waist belt for secure, comfortable stability at height.

- Maximum Load: 140kg
- Attachment: 1 Rear D-Ring, 2 Front Webbing Loops, 2 Lateral Side D-Rings (on Waist Belt)
- Buckle(s): 5 Pass-Through Buckles
- Webbing Breaking Strength: 25kN (Metal Components: D-Rings 23kN, Buckles 15kN)
- Weight: 1.53kg $\pm$ 100g



EN 361:2002
EN 358:2018

SIRIM-DOSH
APPROVED



5-Point
Adjustment



3-Point
Attachment

SIRIM DOSH APPROVED

BODY HARNESS

Personal Protection Equipment (PPE)



K-STRONG ELITE ROOFERS HARNESS AFH300203

The K-Strong Elite Roofer Harness is a specialized roofing and rescue solution, featuring a 3-point attachment system (rear D-ring, front loops, rescue loops) and 3-point adjustment for secure fall arrest and vertical evacuation readiness.

- Maximum Load: 140kg
- Attachment: 1 Rear D-Ring, 2 Front Webbing Loops, 2 Confined Space Rescue Loops
- Buckle(s): 3 Pass-Through Buckles
- Webbing Breaking Strength: 25kN (Metal Components: D-Ring 23kN, Frame & Buckle 15kN)
- Weight: 1.21kg $\pm$ 100g



EN 361:2002
EN 358:2018

SIRIM-DOSH
APPROVED



3-Point
Adjustment



3-Point
Attachment

SIRIM DOSH APPROVED

BODY HARNESS

Personal Protection Equipment (PPE)



K-STRONG EPIC RESCUE HARNESS AFH300404

The K-Strong Epic Rescue Harness is a high-performance suspension and fall-arrest solution featuring a 4-point attachment system, 6-point adjustability, aluminum quick-release buckles, and breathable AirLite padding for demanding technical environments.

- Maximum Load: 140kg
- Attachment: 1 Dorsal D-Ring, 1 Ventral D-Ring, 2 Lateral Side D-Rings (on Waist Belt)
- Buckle(s): Quick Release Buckles
- Webbing Breaking Strength: 25kN (Metal Fittings: 15kN, Quick Buckles: 9kN)
- Weight: 2.46kg $\pm$ 100g



EN 361:2002 EN 813:2008
EN 358:2018

SIRIM-DOSH
APPROVED



**6-Point
Adjustment**



**4-Point
Attachment**

SIRIM DOSH APPROVED

LANYARD

Personal Protection Equipment (PPE)



SAFETYWARE 1.8 METER DOUBLE LANYARD WITH ENERGY ABSORBER FPE203

The SAFETYWARE 1.8 Meter Double Lanyard with Energy Absorber features a carabiner connected to the energy absorber and two scaffolding hooks on twin legs. With a 12mm diameter rope, this lanyard ensures reliable fall protection and is certified to EN 355:2002 & SIRIM-DOSH approved.

- Type: Twin-leg shock-absorbing lanyard.
- Length: 1.8m total length.
- Capacity: 100kg.
- Hardware: Steel carabiner and scaffold hooks.

CE EN 355:2002

SIRIM-DOSH APPROVED 

K-STRONG ELITE SHOCK ABSORBING ELASTICATED WEBBING TWIN LEG LANYARD WITH SNAP & SCAFFOLD HOOKS AFL408389

The KStrong Elite Twin-Leg Lanyard (AFL408389) provides maximum safety and flexibility for 100% tie-off compliance. Its elasticated webbing expands from 1.3m to 1.8m, reducing tripping hazards while offering the reach you need to navigate complex structures.

- Type: Twin-leg shock-absorbing lanyard.
- Flexibility: Elasticated webbing (1.3m relaxed to 1.8m expanded).
- Capacity: 140kg.
- Hardware: Galvanized steel snap and scaffold hooks.

CE EN 355:2002
EN 354:2010

SIRIM-DOSH APPROVED 



SIRIM DOSH APPROVED

MICRON SRL

Personal Protection Equipment (PPE)



K-STRONG MICRON SRL 2 METER WITH ALUMINUM SWIVEL SCAFFOLD HOOK AFS550102

The K-Strong Micron 2-Meter SRL is an ultra-compact, sharp-edge and foot-level rated fall arrester. It features a 360-degree swivel top and an aluminum scaffold hook to prevent twisting, providing lightweight, high-risk protection without sacrificing mobility.

- Type: Self-Retracting Lifeline (SRL).
- Lifeline: 2m length, 21mm high-strength Technocrat webbing.
- Special Ratings: Sharp Edge Rated (R > 0.5mm) & Foot Level Rated (Fall Factor 2).
- Hardware: Aluminum top karabiner and aluminum swivel scaffold hook.

CE EN 360:2023

SIRIM-DOSH APPROVED 

K-STRONG TWIN MICRON SRL 2 METER WITH ALUMINUM SWIVEL SCAFFOLD HOOK AFS550102D

The K-Strong Twin Micron 2-Meter SRL is an ultra-compact, dual-leg fall arrester designed for continuous 100% tie-off compliance. Sharp-edge and foot-level rated (Fall Factor 2), it features 360-degree swivel tops and twin aluminum scaffold hooks to prevent lifeline twisting, providing lightweight, high-risk protection with maximum working mobility.


- Type: Self-Retracting Lifeline (SRL).
- Lifeline: Dual 2m length, 21mm high-strength Technocrat webbing.
- Special Ratings: Sharp Edge Rated (R > 0.5mm) & Foot Level Rated (Fall Factor 2).
- Hardware: Twin Aluminum top karabiner and aluminum swivel scaffold hook.

CE EN 360:2023



SIRIM-DOSH APPROVED 



PERMANENT SYSTEM


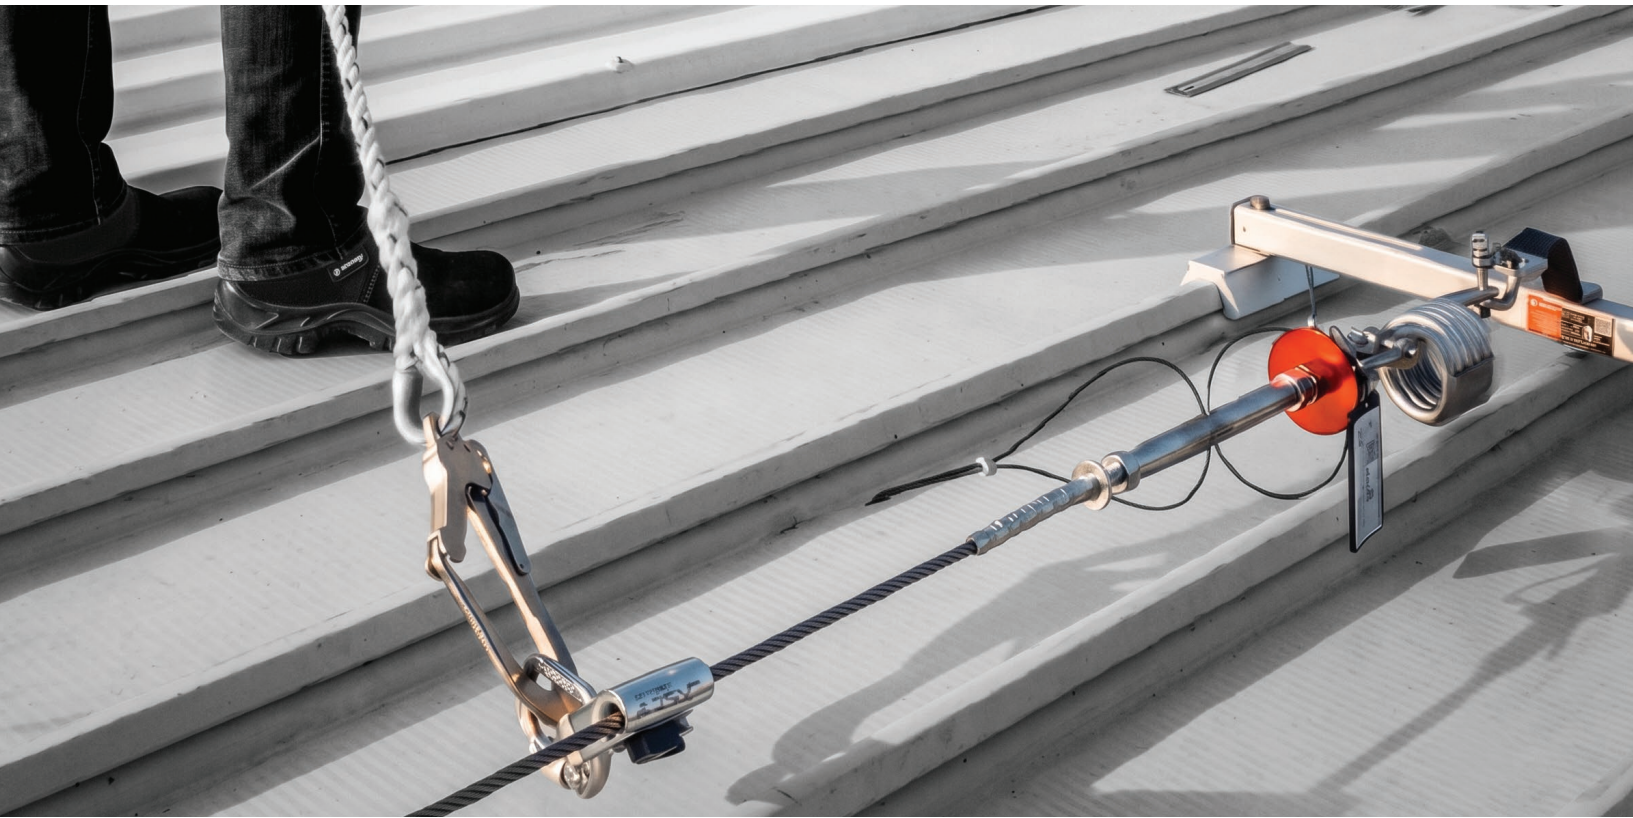


Trapezoid Roof Profiles

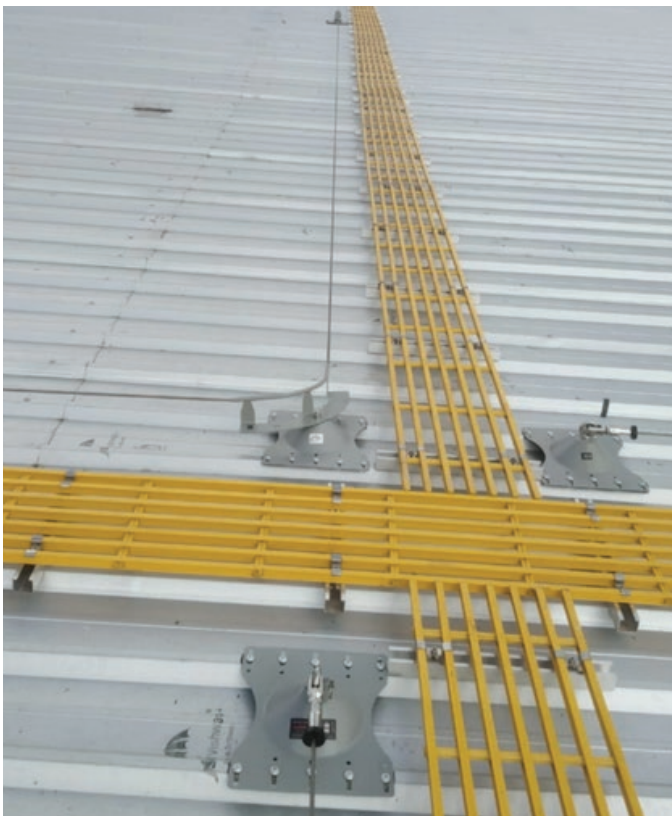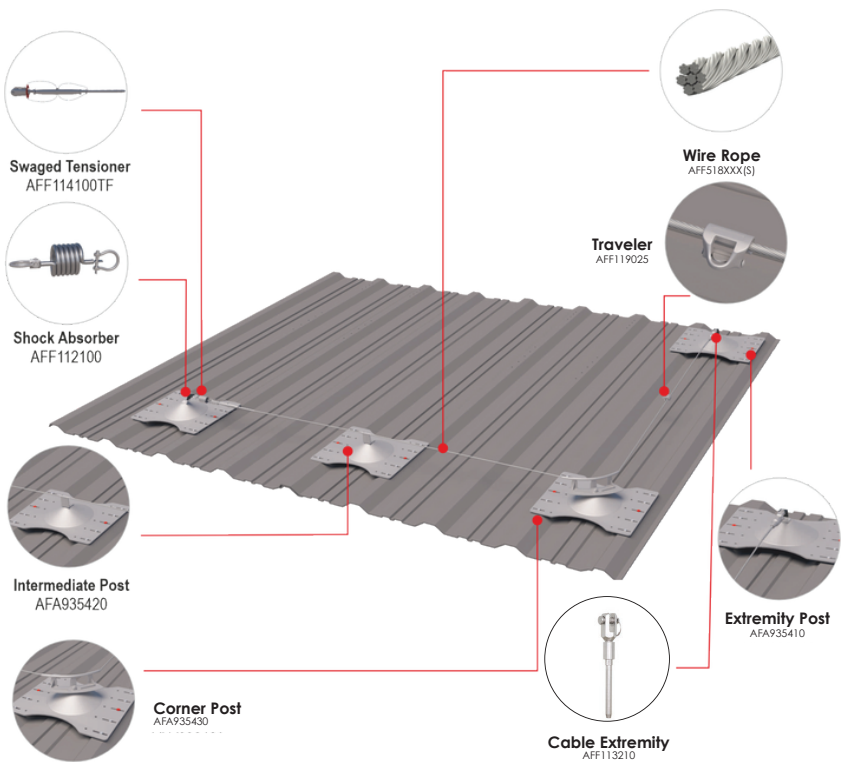


PERMANENT SYSTEM

Kliplok Roof Profiles

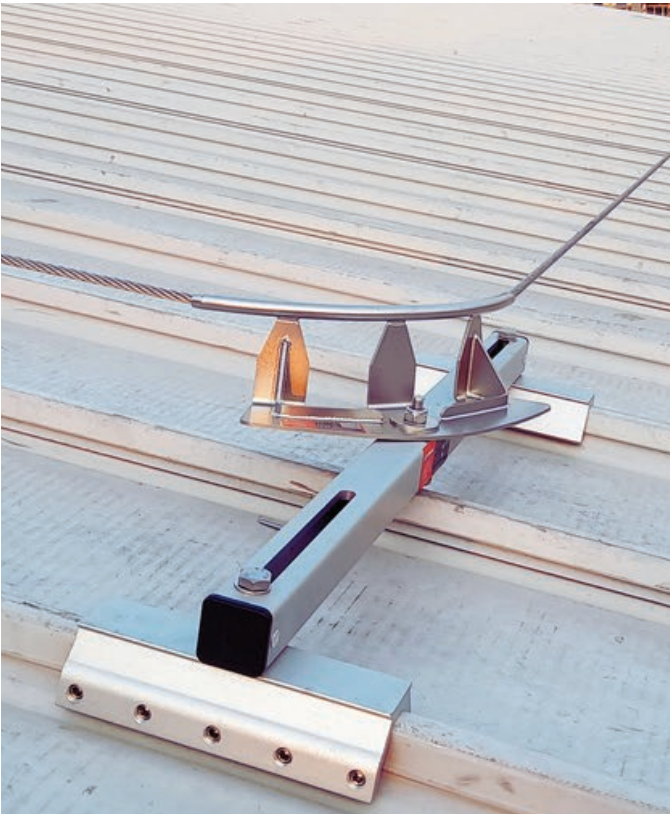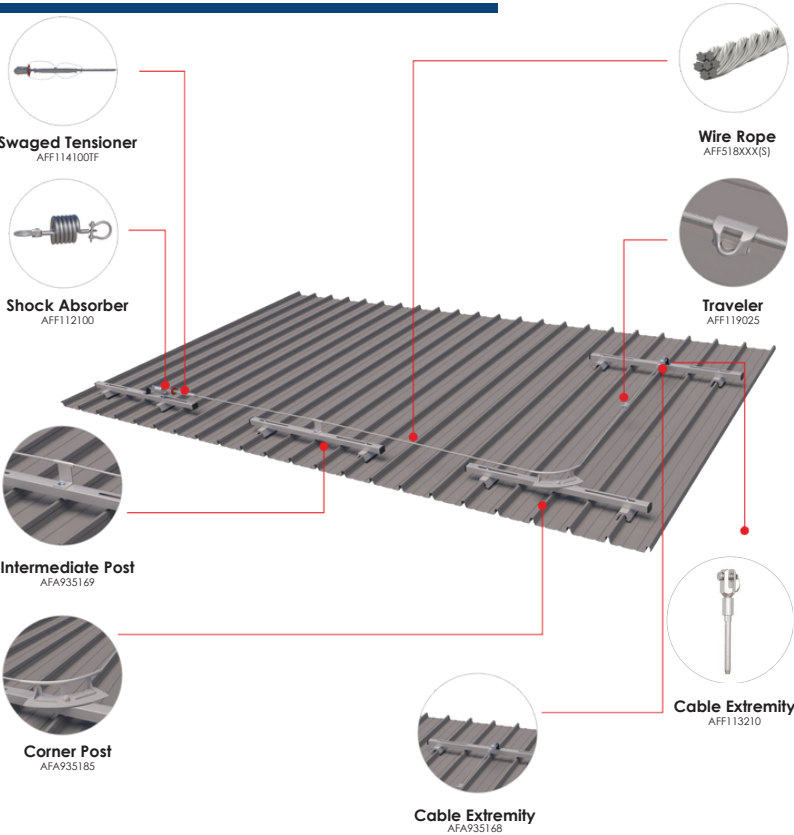


Standing Seam Roof Profiles

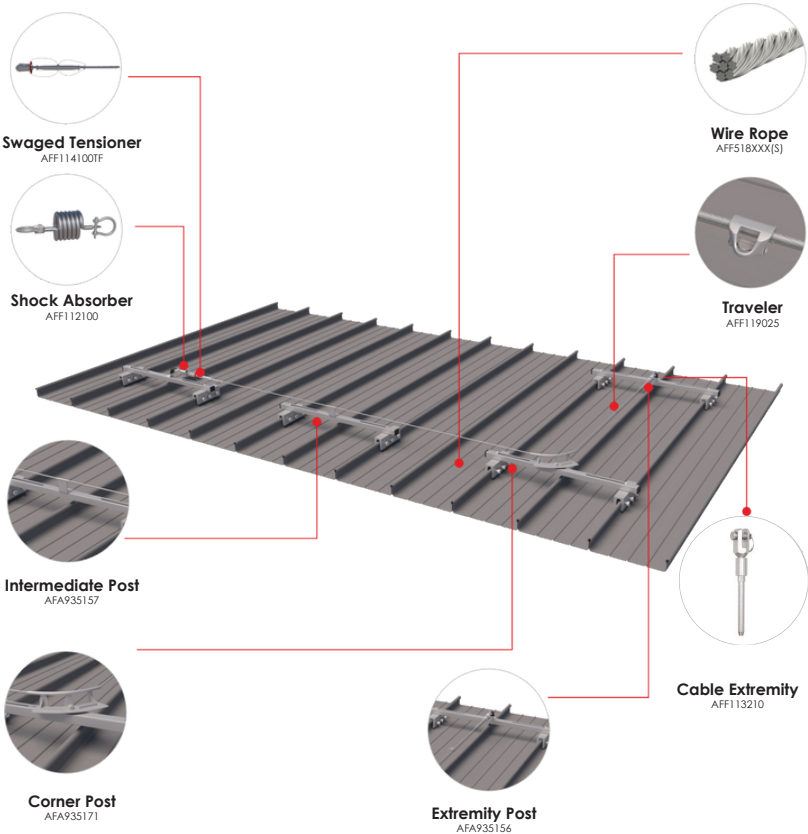


PERMANENT SYSTEM

Vertical Lifeline with Extension Arm

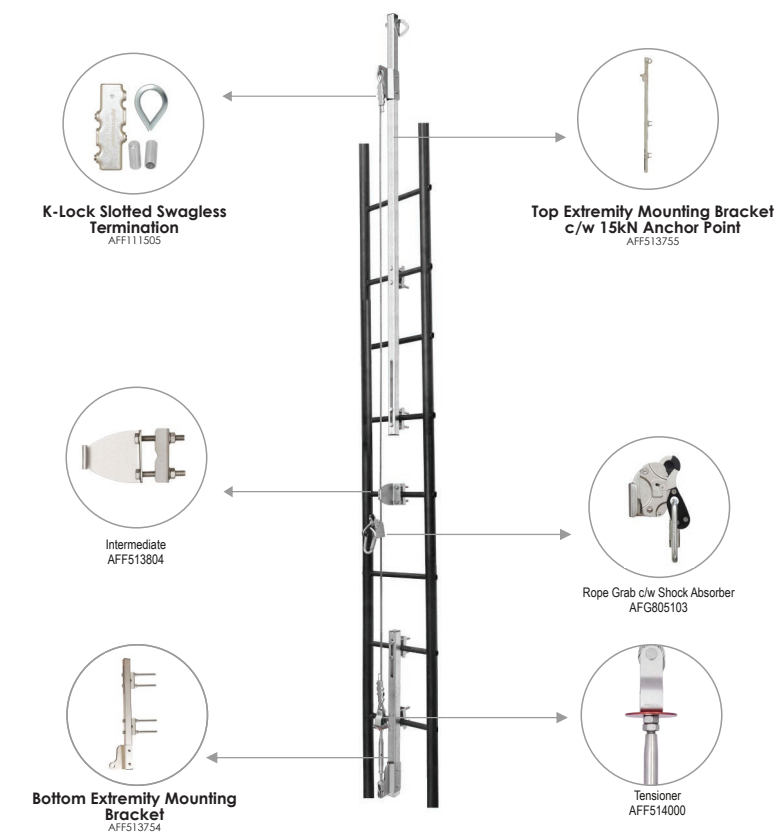

Rigid Structure (Floor, Wall, Ceiling & Mounted)

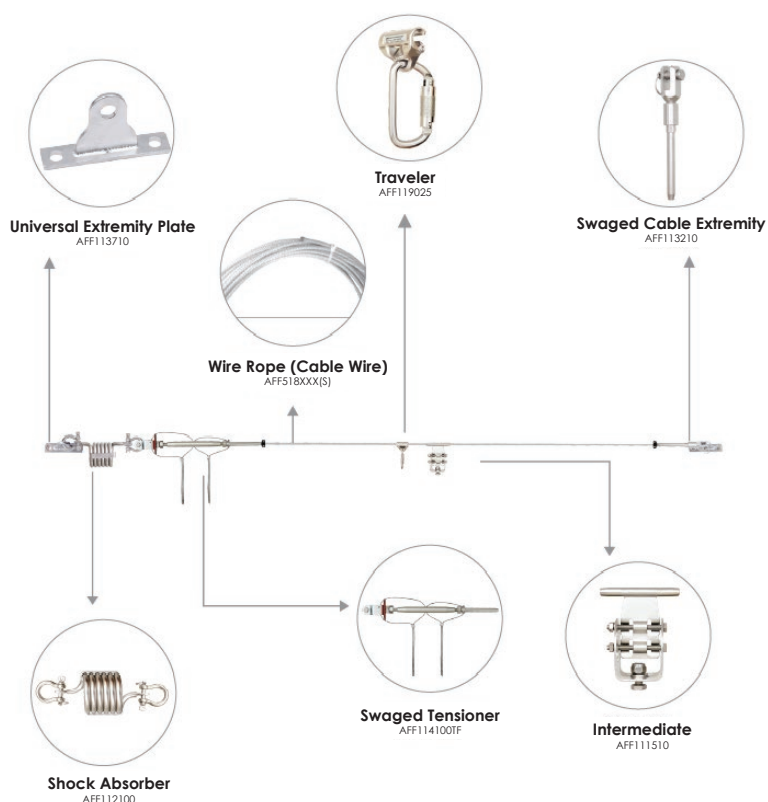

CONFINED SPACE



Winch

K-STRONG EXTREME TYPE B WINCH 20M AFT730042

The K-Strong Twin Micron 2-Meter SRL is an ultra-compact, dual-leg fall arrester designed for continuous 100% tie-off compliance. Sharp-edge and foot-level rated (Fall Factor 2), it features 360-degree swivel tops and twin aluminum scaffold hooks to prevent lifeline twisting, providing lightweight, high-risk protection with maximum working mobility.

- Cable Length: 20 Meters (4.8mm diameter)
- Weight: 11.49 kg $\pm$ 0.010 kg
- System Breaking Strength: 15kN
- Max Load Capacity: 140 kg (Personnel) / 250 kg (Materials)



EN 1496:2017 Class B

CONFINED SPACE

SRL Retrieval



K-STRONG BRUTE RETRIEVAL BLOCK 20 METER WITH STEEL SNAP HOOK

AFS510020R

The K-Strong Brute Retrieval Block is a premium, high-performance Type 3 Self-Retracting Lifeline (SRL) integrated with a built-in rescue winch mechanism. Spanning 20 meters, this dual-purpose safety device is specifically engineered to provide continuous fall protection for personnel working at heights or within confined spaces, while offering a rapid response solution for emergency scenarios

- Lifeline Length: 20 Meters
- Minimum Breaking Strength (Lifeline): 15 kN
- Attachment End Strength: 23 kN (MBS)
- Anchorage End Strength: 23 kN (MBS)
- Load Capacity: 140 kg (User + Tools combined)



EN 360:2002
EN 1496:2017 Class B

K-STRONG BRUTE RETRIEVAL BLOCK 20 METER WITH STEEL SNAP HOOK

AFS510030R

The K-Strong Brute Retrieval Block is a premium, high-performance Type 3 Self-Retracting Lifeline (SRL) integrated with a built-in rescue winch mechanism. Spanning 30 meters, this dual-purpose safety device is specifically engineered to provide continuous fall protection for personnel working at heights or within confined spaces, while offering a rapid response solution for emergency scenarios

- Lifeline Length: 30 Meters
- Minimum Breaking Strength (Lifeline): 15 kN
- Attachment End Strength: 23 kN (MBS)
- Anchorage End Strength: 23 kN (MBS)
- Load Capacity: 140 kg (User + Tools combined)



EN 360:2002
EN 1496:2017 Class B



CONFINED SPACE

Tripod



K-STRONG MEGAPOD TRIPOD (7FT) FOR 2 USERS AFT710007HD

The K-Strong MegaPod 7ft Tripod is a premier portable anchor system engineered specifically for the demanding requirements of confined space entry, retrieval, and emergency rescue missions. Built to transform complex rescue challenges into precise, efficient operating procedures, it is certified to support a simultaneous two-person team in extreme industrial environments.

- Usable Height: Adjustable from 1.25 meters to 2.24 meters (fully extended)
- System Strength: 23 kN
- Maximum Weight Capacity (Personal Use): 200 kg (Suitable for 2 Users)
- Maximum Weight Capacity (Material Handling): 650 kg
- Unit Net Weight: 19.01 kg (± 0.10 kg)

CE EN 795:2012 Type B

K-STRONG MEGAPOD TRIPOD (10FT) FOR 2 USERS AFT710010HD

The K-Strong MegaPod 10ft Tripod is a premier portable anchor system engineered specifically for the demanding requirements of confined space entry, retrieval, and emergency rescue missions. Built to transform complex rescue challenges into precise, efficient operating procedures, it is certified to support a simultaneous two-person team in extreme industrial environments.

- Usable Height: Adjustable from 1.25 meters to 2.24 meters (fully extended)
- System Strength: 23 kN
- Maximum Weight Capacity (Personal Use): 200 kg (Suitable for 2 Users)
- Maximum Weight Capacity (Material Handling): 650 kg
- Unit Net Weight: 19.01 kg (± 0.10 kg)



CE EN 795:2012 Type B

CONFINED SPACE

Davit Arm

K-STRONG MODULAR DAVITS WITH FLOOR MOUNTING BASE AFT751021



The K-Strong Extreme Modular Davit System is a high-performance, premium safety solution engineered specifically for confined space entry, fall arrest, retrieval, and rescue applications. Ideal for large confined areas like manholes, underground vaults, and storage tanks, this system provides a portable, safe overhead anchorage point where traditional structures are unfeasible.

- System Strength: 15 kN Minimum Breaking Strength
- Rotation Capability: 360-Degree Continuous Rotation
- Total System Weight: 53.87 kgs $\pm$ 0.30 kgs
- Anchorage Points: Built-in pulleys + Auxiliary Eye Nut rated to 23 kN
- Maximum Load Capacity:
 - 500 kg (For Confined Space Personnel Rescue)
 - 250 kg (For Material Lifting per Machine Directive)

CE EN 795:2012 Type A

K-STRONG MODULAR DAVITS WITH WALL MOUNTING BASE AFT751031

The K-Strong Extreme Modular Davit System is a high-performance, premium safety solution engineered specifically for confined space entry, fall arrest, retrieval, and rescue applications. Ideal for large confined areas like manholes, underground vaults, and storage tanks, this system provides a portable, safe overhead anchorage point where traditional structures are unfeasible.

- System Strength: 15 kN Minimum Breaking Strength
- Rotation Capability: 360-Degree Continuous Rotation
- Total System Weight: 54.41 kgs $\pm$ 0.30 kgs
- Anchorage Points: Built-in pulleys + Auxiliary Eye Nut rated to 23 kN
- Maximum Load Capacity:
 - 500 kg (For Confined Space Personnel Rescue)
 - 250 kg (For Material Lifting per Machine Directive)

CE EN 795:2012 Type A






FALL PROTECTION PPE SOLUTIONS


1	2	3	4	5	6	7	8	9	10	11	12
KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)	KTECH RESCUE/CLIMBING HELMET (AHC101001W)
ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ESSENTIAL HARNESS (AFH300058)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)	ELITE ROOFER HARNESS (AFH300203)
MICRON SRL (AFS550102)	ROOFERS KIT (AFH300054)	ESSENTIAL SHOCK ABSORBING WEBBING TWIN LANYARD (AFL401070(1.8M))	VERTICAL LADDER LIFELINE KIT (10M) (AFF6000KIT(10))	BRUTE SRL W/ RETRIEVAL SYSTEM (AFS510020R)	TWIN MICRON SRL (AFS550102D)	ELITE SHOCK ABSORBING ELASTICATED TWIN LANYARD (AFL408389(1.8M))	BRUTE SRL SHARP EDGE 10M (AFS510010SE)	EPIC WORK POSITIONING LANYARD (AFL405351)	ROOFERS KIT (AFH300054)	BRUTE SRL RETRACTABLE 6M (AFS510006)	ELITE SHOCK ABSORBING ELASTICATED TWIN LANYARD (AFL408389(1.8M))
WEBBING ANCHOR STRAP (AFA92515)	ROPE GRAB W/ 20M KERNMANTLE ROPE (AFA951201)	ROPE GRAB W/ 20M KERNMANTLE ROPE (AFA951201)	ROPE GRAB W/ 20M KERNMANTLE ROPE (AFA951201)	MEGAPOD TRIPOD (7FT) (AFT710007HD)	SPREADER BAR (AFX201011)	SUSPENSION TRAUMA STRAP (AFZ150100)	SUSPENSION TRAUMA STRAP (AFZ150100)	DOOR ANCHOR (AFA930950)	SUSPENSION TRAUMA STRAP (AFZ150100)	SUSPENSION TRAUMA STRAP (AFZ150100)	SUSPENSION TRAUMA STRAP (AFZ150100)
	EPIC WORK POSITIONING LANYARD (AFL405351)	EPIC WORK POSITIONING LANYARD (AFL405351)	EPIC WORK POSITIONING LANYARD (AFL405351)	MATERIALS/PERSONAL 20M WINCH (AFT730042)	RETRIEVAL BRACKET (AFT710007UR)						
										OVERHEAD LIFELINE (AFF4000)	OVERHEAD LIFELINE (AFF4000)

THEY TRUST US. YOU CAN TOO.

MAJLIS BANDARAYA JOHOR BAHRU (MBJB)

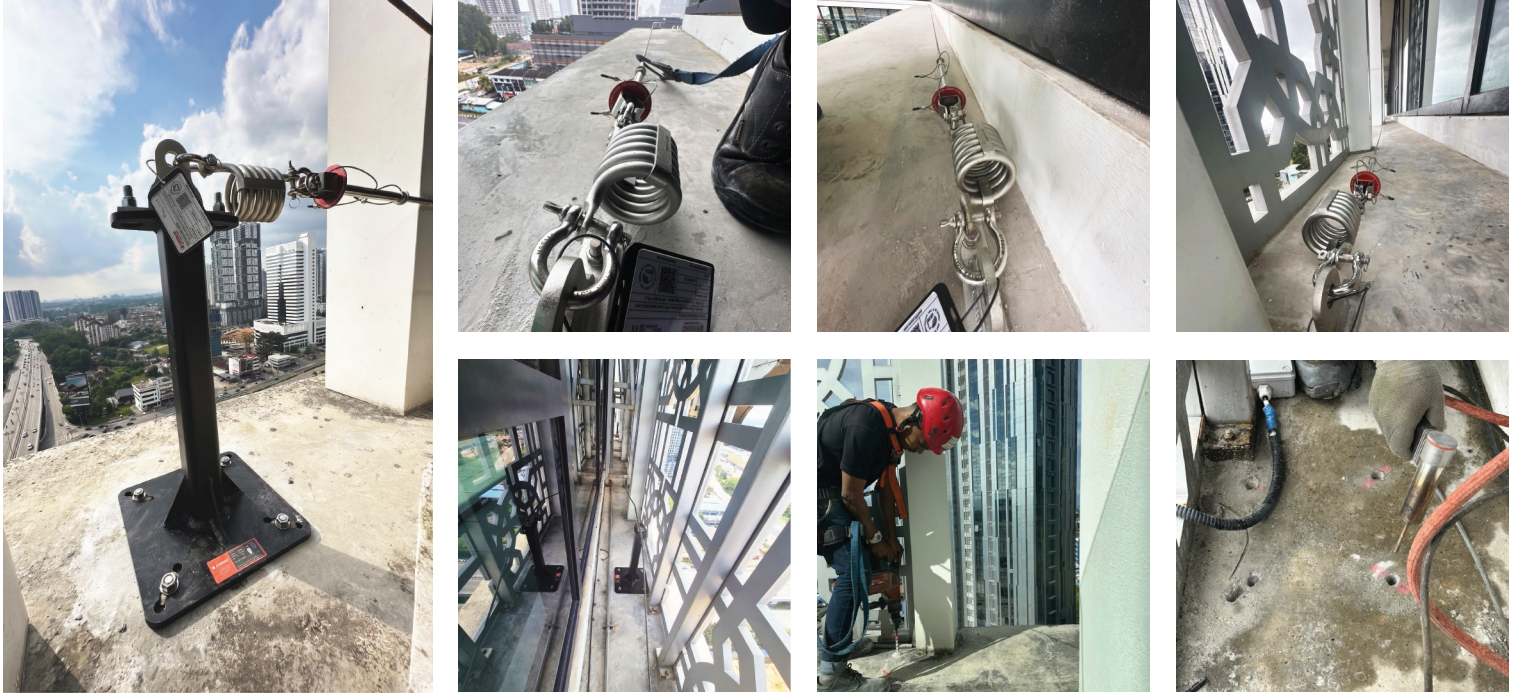

MULTINATIONAL CHOCOLATE FACTORY




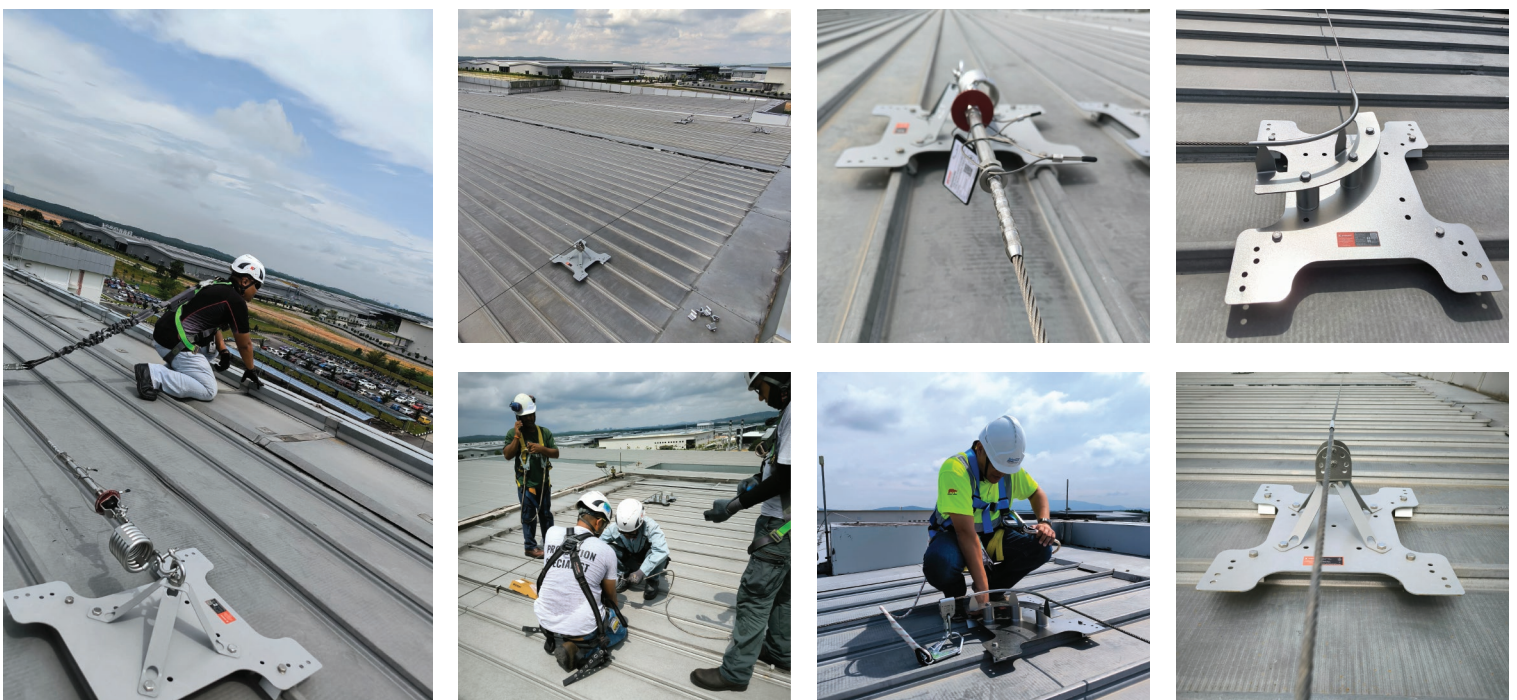


THEY TRUST US. YOU CAN TOO.

KPJ BANDAR DATO' ONN SPECIALIST HOSPITAL





ADVANCED TECHNICAL LAMINATES MALAYSIA

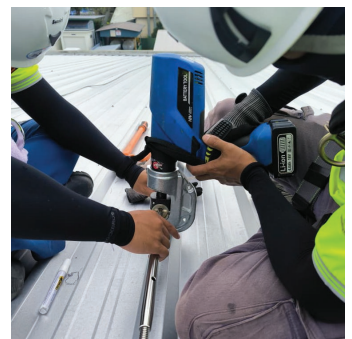



THEY TRUST US. YOU CAN TOO.

ASAS ASIA (M) SDN. BHD.



JOHORE TIN BERHAD

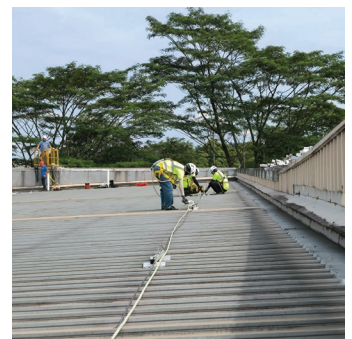



E-CATALOGUE
YOU CAN SCAN HERE TO
GET YOUR OWN COPY OF
OUR CATALOGUE!



SAFETYWARE GROUP BERHAD 202001037668 (1393989-P)



MALAYSIA

SAFETYWARE SDN. BHD.
200301030551 (632971-x)

**SAFETYWARE SOLUTIONS
SDN. BHD.**
198301004351 (99556-U)

**SAFETYWARE EHS
CONSULTANCY SDN. BHD.**
201101036060 (954196-M)

**KEYWAY DIGITAL LABS
SDN. BHD.**
202401033160 (1579008-U)

Penang Head Office
Plot 237, Lengkok Perindustrian Bukit
Minyak 3, Bukit Minyak Industrial Estate,
14100 Simpang Ampat, Penang,
Malaysia
Tel: +604-5023 882 (8 Lines)
Fax : +604-5081 882

Kuala Lumpur Office
No. 8, Jalan Delta U6/18,
Taman Perindustrian Sunway Subang,
Seksyen U6,
40150 Shah Alam, Selangor, Malaysia.
Tel: +603-6262 0882 (4 Lines)
Fax : +603-6270 0393

Melaka Office
No. 6A & 6A-1, Jalan IKS M 5,
Taman IKS Merdeka,
75350 Batu Berendam,
Melaka, Malaysia.
Tel: +606-336 3882 (2 Lines)
Fax : +606-337 5881

Johor Office
No.8 Jalan Ekoperniagaan 2/3,
Taman Ekoperniagaan,
81100 Johor Bharu, Johor,
Malaysia.
Tel: +607-511 4882
Fax : +607-562 8880

Pahang Office
A21, Lorong Balok Perdana 3/1,
Taman Balok Perdana,
26080 Kuantan, Pahang,
Malaysia.
Tel: +609-509 3882 (2 Lines)
Fax : +609-509 3880

Sabah Office
DBKK Unit, No.7, Lot 7, Lorong
Bizhub 1, Sierra Bizhub Warehouse,
Batu 13.5, Jalan Tuaran, 88450 Kota
Kinabalu, Sabah, Malaysia.
Tel: +608-841 2982
Fax : +608-848 9282

Sarawak Office
Gr flr and 1st flr, Sublot 6,
City Square Phase II,
Section 64, KTL, Jalan Pending,
93450 Kuching, Sarawak, Malaysia.
Tel: +608-226 6182
Fax : +608-226 6182



AUSTRALIA

SAFETYWARE AUSTRALIA PTE LTD
(ABN:1940065096)

5/21 Yiannis Court,
Springvale, VIC 3171, Australia.
Tel: +61 3 9103 1428



SINGAPORE

SAFETYWARE (SG) PTE LTD
(201208598R)

10 Raeburn Park,
#02-08,
Singapore 088702.
Tel: +65 6744 0882/ +65 9819 3376



THAILAND

SAFETYWARE ALLIANCE CO., LTD.
(0115567040457)

34/9 Moo 13, Thepharath Rd.,
Bangpleeyai,
Bangplee, Samutprakarn 10540
Bangkok, Thailand.
Tel: +66 02-066-4699
Fax: +66 02-066-4699

www.safetyware.com
info@safetyware.com