

PRODUCT SPECIFICATION

SAFETYWARE Emergency Escape Breathing Devices (EEBD)

- Designed for easy donning and optimal respiratory protection.
- Easy operation – starts automatically when the bag is opened.
- Encased in a carry bag that, when opened, triggers the supply of breathable air.
- Maintains overpressure inside the hood to prevent inhaling toxic gases.
- Integrated inflatable air cushion on the back of the head automatically adjusts the hood for a secure fit.
- Hands-free during donning for maximum safety and comfort.
- Includes an alarm whistle to signal low air supply.
- Comes with a 3L steel cylinder.
- Essential for industrial settings with potential hazards.
- To be placed strategically in workplaces.
- Provides exceptional respiratory protection for emergency escapes from areas with sudden hazardous conditions.


APPLICATIONS

- Marine
- Chemical
- Oil/ gas

TECHNICAL DATA

MATERIAL	Cylinder: Steel Hood: Flame retardant PVC Tube: Flame retardant PVC Storage bag: Flame retardant PVC
AIR CYLINDER	3L
WORKING DURATION	≥ 15 minutes
WORKING PRESSURE	210 Bar
FLOW RATE	40 L Air/Min
WEIGHT	7 kg
APPROVED TEMPERATURE	-30 °C to 60 °C
STANDARD	EN 1146:2005, ISO 23269-1:2008, SOLAS, IMO Res. MSC.98(73)
DIMENSION	590 mm x 250 mm x 175 mm

Item Code: EEBD-SS30

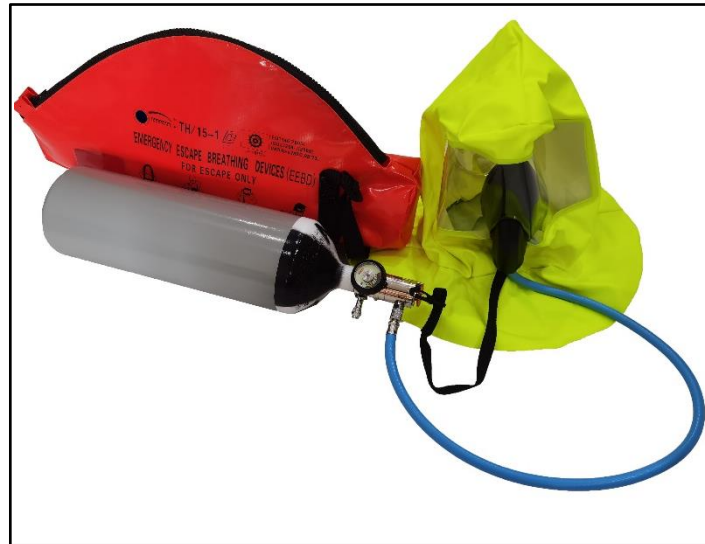

INSTRUCTIONS FOR USE

1. Wear the emergency escape respirator around your neck by its shoulder strap.
2. Open the seal and unzip the storage bag
3. Take out the hood and cover it over your head with the viewing window directly in front of you.
4. Hold the storage bag with both hands and escape from the scene

SAFETYWARE SDN. BHD. (632971-X)

Plot 237, Lengkok Perindustrian Bukit Minyak 3,
Bukit Minyak Industrial Estate,
14100 Simpang Ampat, Penang, Malaysia

Tel : +604-5023 882 | Fax : +604-5081 882
www.safetyware.com | info@safetyware.com

It is the product users' responsibility to conduct all the appropriate evaluations & testing to determine the suitability of SAFETYWARE products for use in a particular environment or purpose. SAFETYWARE disclaims all warranties other than as expressly provided.

Date created: 18/10/2023

Revision: 00